


RING FLANGE-TYTE® GASKET

4"–36" for Flanged Joints
for Water & Wastewater,
Fire Protection &
Industrial Applications

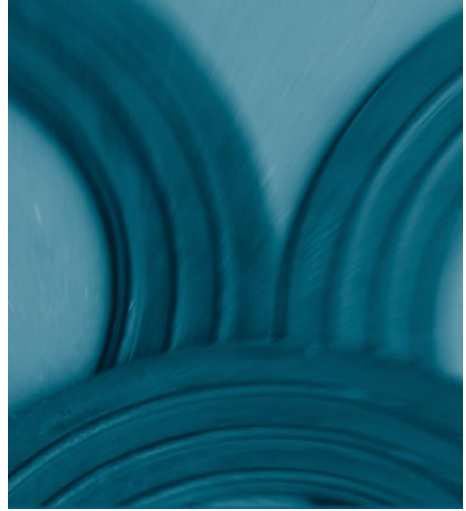

PIPE
FABRICATION
RESTRAINED JOINTS
FITTINGS
GASKETS
COATINGS & LININGS

**U.S.
PIPE**

A QUIKRETE® COMPANY

CONTENTS

RING FLANGE-TYTE® Gasket Introduction	2
Pressure Performance	2
Torque Performance	2
Compatibility	2
Special Elastomers & Applications	3
Thickness & Materials	4
Suggested Specification	4
Assembly Procedure	4
Storage Recommendation	4
Drawing - Technical Data	5
Products for Water, Wastewater and Fire Protection	6




U.S.
PIPE

RING FLANGE-TYTE® GASKET



Ring Style Gasket

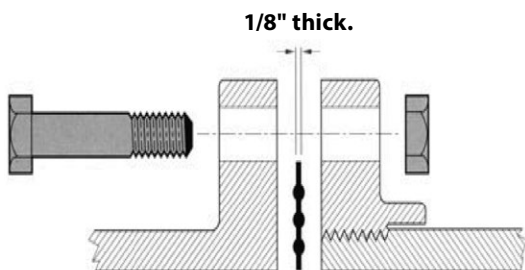

The RING FLANGE-TYTE® Gasket is a high performance gasket for flanged joint piping systems.

The most vulnerable element of a piping system is the joint. Many times, the weakest part of the joint is the gasket that is used. Lots of time and money are spent in the design and specification of the pipe, fittings, valves, and various components of the project to insure the piping system is able to withstand the requirements of your application, only to have all that time and expense undermined by the lowest cost item in the piping system; a flat sheet of thin rubber between the flanges. U.S. Pipe offers a solution that will provide peace of mind through superior performance, the RING FLANGE-TYTE® Gasket. Below we list some of the high performance features this product provides.

Pressure: By combining the effectiveness of "o-ring" technology into a molded flat gasket, the RING FLANGE-TYTE® Gasket can operate safely at high internal pressures, high velocities, and still handle the common occurrence of surges in pressure without fear of joint leaks. The gasket may also help to resolve installation issues that arise such as imperfections in the flange face, flange alignment, and pipe or equipment alignment.

The RING FLANGE-TYTE® Gasket is rated for a water working pressure of 350 psi for 4"-24" sizes, 250 psi for 30"-36" sizes. If your application requires higher working pressures, please contact your U.S. Pipe Sales Representative. The gasket is listed by Underwriters Laboratories and flanged joints with RING FLANGE-TYTE® Gaskets are approved by Factory Mutual.

Torque: The RING FLANGE-TYTE® Gasket employs (3) - "bulb type" rings on the faces of both sides of the gasket (see drawing page 4). This provides 3 times the sealing peace of mind than gaskets that provide only (1) bulb, or none at all. By using (3) - "bulb type" rings on the face of the gasket, the bolt torque required to effectively complete the seal is greatly reduced. This results in reducing stresses on flanges, bolts, and nuts in addition to providing a much safer and dependable assembly for the installer. Please refer to the bolt torque ratings in Table 1 on page 4.

Compatibility: The RING FLANGE-TYTE Gasket is compatible with flanges conforming to ANSI/AWWA C115/ A21.15, ANSI/AWWA C110/ A21.10, ASME B16.1 class 125, and ANSI/AWWA C207 class B, D, and E flanges (however, the Maximum pressure rating will be that of Class B,D and E flanges) and ANSI B16.5 in sizes 4" - 24" with flat faced flanges. RING FLANGE-TYTE gaskets are NOT designed for use with class 250 lb flanges or ANSI/AWWA C207 class F flanges.

NOTE: U.S. Pipe recommends the use of FULL FACE FLANGE-TYTE® Gaskets or RING FLANGE-TYTE® Gaskets with all ductile iron flanged joint products supplied by U.S. Pipe. Failure to use a FLANGE- TYTE® gasket on any fabricated pipe product 14" or larger could result in voiding the manufacturer's warranty. FLANGE- TYTE® gaskets were designed for superior sealing performance on ductile iron flanges of all types and to aid in alignment issues that may arise on projects. Flat rubber gaskets are NOT considered equal in performance and may not provide the sealing capability requirements of a project. In addition, their use could result in unintended damage to the flanges and threads of the fabricated pipe by applying excess torque to the bolts/flanges in order to seal the joint.



SPECIAL ELASTOMERS & APPLICATIONS

U.S. Pipe offers RING FLANGE-TYTE® Gaskets made of special elastomers which may be necessary for special applications. High temperature water and air applications and piping systems transmitting fluids with elevated contact with certain oils or chemicals may require elastomers with enhanced performance criteria. The table below can be used to assist in gasket selection. If special elastomers are required for your project, it is necessary to include the requirement in the project specifications and on the purchase order to U.S. Pipe.

Description	Maximum Service Temperature ^{1,2}		Uses ³
	Water & Sewer °F	Air ⁴ °F	
SBR (Styrene Butadiene)	150	125	Common: Drinking Water, Sea Water, Sanitary Sewage, Reclaimed Water, Raw Water, Storm Water
Nitrile (NBR) (Acrylonitrile Butadiene)	150	125	Common: Alcohols, Dilute Acids, Dilute Alkalis, Ketones (MEK, Acetone), Vegetable Oil Other Acceptable Services: Drinking Water, Sea Water, Sanitary Sewage, Reclaimed Water, Raw Water, Storm Water
Neoprene® (Polychloroprene)	200	150	Common: Hydrocarbons, Fats, Oils, Greases, Chemicals, Oils & Fluids, Refined Petroleum Other Acceptable Services: Drinking Water, Sanitary Sewage, Reclaimed Water, Raw Water, Storm Water
EPDM (Ethylene Propylene Diene Monomer)	212	150	Common: Greasy Waste Other Acceptable Services: Sea Water, Sanitary Sewage, Reclaimed Water, Raw Water, Storm Water
FKM ⁵	212	300	Common: Aromatic Hydrocarbons and Fuels, Acids, Vegetable Oils, Petroleum Products, Chlorinated Hydrocarbons, Most Chemicals and Solvents Other Acceptable Services: Drinking Water, Reclaimed Water, Raw Water, Storm Water

¹ Maximum service temperatures listed are intended as general guidelines for ductile iron pipe gaskets. For service temperatures greater than those listed, consult pipe manufacturer for specific recommendations.

² Maximum service temperature is not usually a meaningful parameter for piping gaskets; however, low temperatures during pipeline installation may necessitate precautions. Consult your U.S. Pipe Sales Representative for pertinent recommendations.

³ Water, including sewage, with low levels of the listed contaminants.

⁴ Lubricating oil in the air will adversely affect SBR and EPDM performance.

⁵ Consult your U.S. Pipe Sales Representative for availability of FKM gaskets.

RING FLANGE-TYTE® GASKET

ANSI/AWWA Standards

ANSI/AWWA C115/A21.15

Flanged Ductile-Iron Pipe
with Ductile-Iron or Gray-Iron
Threaded Flanges

ANSI/AWWA C110/A21.10

Ductile-Iron and Gray-Iron Fittings
for Water

ANSI/AWWA C153/A21.53

Ductile-Iron Compact Fittings
for Water Service

ANSI/AWWA C111/A21.11

Rubber-Gasket Joints for Ductile-Iron
Pressure Pipe and Fittings

ASME/ANSI B16.1

Cast Iron Pipe Flanges and
Flanged Fittings

ASME/ANSI B16.5

Pipe Flanges and Flanged Fittings

AWWA C207

Steel Pipe Flanges for Waterworks
Service - Sizes 4 in. through 144 in.

Gasket Thickness and Materials: The RING FLANGE-TYTE® Gasket is only offered in 1/8" thickness per the recommendation of **ANSI/AWWA C115/A21.15** Appendix A, Sec. A.2. The RING FLANGE-TYTE® Gasket is commonly provided in SBR elastomer which is adequate for most conditions of service for potable or domestic wastewater contact. SBR elastomer carries a maximum service temperature of 150°F for water and 125°F for air applications.

Suggested Specification: Ductile Iron pipe flanged joints shall conform to **ANSI/AWWA C115/A21.15**. Gaskets for Ductile Iron flanged joints shall be ring type SBR elastomer per **ANSI/AWWA C111/A21.11** and shall be 1/8" thickness. Flanged gaskets shall be the high performance type satisfying the special requirements of **ANSI/AWWA C111/A21.11** Appendix C, Sec. C.2 and have at least (3) bulb type rings molded into both faces of the gasket. Flanged gaskets shall be U.S. Pipe RING FLANGE-TYTE® Gasket or pre-approved equal.

Assembly Procedures: The RING FLANGE-TYTE® Gasket should be assembled using the same general procedures and practices for installing flanged joints. **ANSI/AWWA C115/A21.15** Appendix C, Sec. C.3 can be used for general guidance.

The use of flanged joints underground is NOT recommended because of the rigidity of the joint.

The faces of the flanges must be free of sand, grit, grease, or other foreign matter.

For smaller diameter joints, align the flanges and insert several bolts in the lower half of the flanges. Drop the RING FLANGE-TYTE® Gasket between the two flanges so that the gasket rests on the lower bolts. Insert the remaining bolts and follow the tightening procedure below.



Flanged bolts should be tightened in a progressively crisscross pattern, such as tightening the bottom bolt; then, the top bolt; next, the bolts at either side; and finally, the remaining bolts. This process should be repeated until all bolts are sufficiently tightened.

See Table 1, Page 5 for bolt torque requirements.

Storage Recommendation: Gaskets should be stored in a cool location, out of direct sunlight and shall not come in contact with petroleum products. Gaskets should be inaccessible to vermin and should be stored away from any electrical equipment such as switchgear unless adequate precautions are taken to avoid the concentration of ozone in the storage area.

Gaskets should be used on a first-in, first-out basis and should be inspected annually and prior to installation. Evidence of surface cracking, dry rot, or vermin attack is cause for discarding the gaskets and replacement with new gaskets.

RING FLANGE-TYTE® GASKET

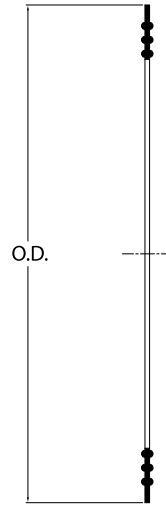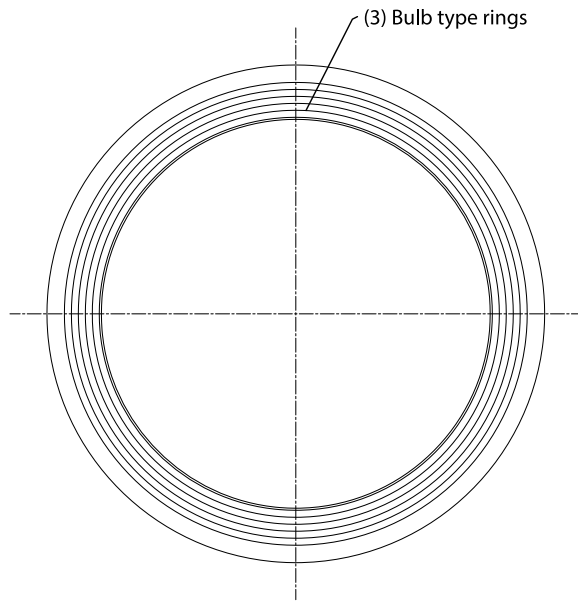

NOTE: U.S. Pipe recommends the use of FULL FACE FLANGE-TYTE® Gaskets or RING FLANGE-TYTE® Gaskets with all ductile iron flanged joint products supplied by U.S. Pipe. Failure to use a Flange-TYTE® gasket on any fabricated pipe product 14" or larger could result in voiding the manufacturer's warranty. Flange-TYTE® gaskets were designed for superior sealing performance on ductile iron flanges of all types and to aid in alignment issues that may arise on projects. Flat rubber gaskets are NOT considered equal in performance and may not provide the sealing capability requirements of a project. In addition, their use could result in unintended damage to the flanges and threads of the fabricated pipe by applying excess torque to the bolts/flanges in order to seal the joint.

Table 1. Technical Data

SIZE INCHES	OD INCHES	BULB-TYPE RINGS EACH SIDE	BOLT TORQUE FT-LB		
			WORKING PRESSURE PSI		
			150	250	350
4	6.88	3	-	90	110
6	8.75	3	-	90	110
8	11.00	3	-	90	110
10	13.38	3	-	90	130
12	16.13	3	-	90	130
14	17.75	3	-	110	150
16	20.25	3	-	110	160
18	21.63	3	-	120	180
20	23.88	3	-	120	200
24	28.25	3	-	130	220
30	34.75	3	-	140	-
36	41.25	3	-	160	-

NOTE:

Gasket Thickness: All RING FLANGE-TYTE® Gaskets are 1/8" thickness. Thinner gaskets are NOT recommended for use with Ductile Iron flanges.

Material: Unless otherwise specified by the purchaser, gaskets will be furnished as SBR. Special elastomers such as neoprene, nitrile, EPDM, and fluorocarbon are available upon request. Gaskets made with special elastomers are marked with color dots. Neoprene is yellow, EPDM is orange, Nitrile is green, Fluorocarbon is red or printed with name identification.

Assembly: See Page 4 of the RING FLANGE-TYTE® Brochure for guidance.

Compatibility: The RING FLANGE-TYTE Gasket is compatible with flanges conforming to **ANSI/AWWA C115/ A21.15, ANSI/AWWA C110/A21.10, ASME B16.1 class 125, and ANSI/AWWA C207 class B, D, and E flanges** (however, the Maximum pressure rating will be that of Class B,D and E flanges) and **ANSI B16.5** in sizes 4" - 24" with flat faced flanges. RING FLANGE-TYTE gaskets are **NOT** designed for use with class 250 lb flanges or ANSI/AWWA C207 class F flanges.

PRODUCTS FOR WATER, WASTEWATER AND FIRE PROTECTION

Our products are manufactured in conformance with National Standards so that our customers may be assured of getting the performance and longevity they expect. Use of accessories or other appurtenances that do not comply with recognized standards may jeopardize the performance and longevity of the project.

Push-on Joint	SIZE RANGE
TYTON JOINT® Pipe	3"–64" Ductile Iron

Restrained Joints	
Mechanical Joint Pipe	4"–12" Ductile Iron
HDSS® Pipe	4"–54" Ductile Iron
HP LOK™ Restrained Joint	30"–42"
Flanged Pipe	4"–64" Ductile Iron
HP LOK™ Restrained Joint	30"–42"
MJ FIELD LOK® Gaskets	4"–12", 16"
FIELD LOK 350® Gaskets	4"–24"
TR FLEX GRIPPER® Rings	4"–36" Ductile Iron
TR TELE FLEX® Assemblies	4"–24" Ductile Iron

Ductile Iron Fittings	
TYTON® Fittings	14"–64" Ductile Iron
M-FLEX™ Restrained Joint Ball Fitting	12"–36"
TRIM TYTON® Fittings	4"–12" Ductile Iron
TR FLEX® Fittings & TR FLEX® Telescoping Sleeves	4"–36" Ductile Iron
Mechanical Joint Fittings	3"–48" Ductile Iron
HP LOK™ Fittings	30"–64" Ductile Iron
TRIM TYTE® MJ Fittings	3"–48" Ductile Iron
Flanged Fittings	3"–64" Ductile Iron
XTRA FLEX® Couplings	4"–24" Ductile Iron

Miscellaneous Products	
PROTECTO 401™ Lined Ductile Iron Pipe for Domestic Sewage and Industrial Wastes	4"–64" Ductile Iron
RING FLANGE-TYTE™ Gaskets	4"–36"
FULL FACE FLANGE-TYTE™ Gaskets	4"–64"
Saddle Outlets	Various Ductile Iron
Welded Outlets	Various Ductile Iron
Polyethylene Encasement	4"–64"

© 2026 U.S. Pipe. All rights reserved.

RING FLANGE-TYTE® Submittal Document
(Rev. 05/2026)

Materials and specifications are subject to change without notice.

U.S. Pipe, RING FLANGE-TYTE®, FULL FACE FLANGE-TYTE®, TR TELE FLEX®, TYTON JOINT®, TR FLEX®, HP LOK®, USIFLEX®, MJ FIELD LOK®, FIELD LOK 350®, TR FLEX GRIPPER®, TRIM TYTON®, XTRA FLEX®, their respective logos, as well as corporate and product identity used herein, are trademarks owned by U.S. Pipe or its affiliated companies and may not be used without permission. All other trademarks are the property of their respective owners.

Our products are manufactured in conformance with national standards so that our customers may be assured of getting the performance and longevity they expect. Use of accessories or other appurtenances that do not comply with recognized standards may jeopardize the performance and longevity of the project.



A QUIKRETE® COMPANY

Headquarters

U.S. Pipe
Two Chase Corporate Drive
Suite 200
Birmingham, AL 35244

866-347-7473
info@uspipe.com
www.uspipe.com